
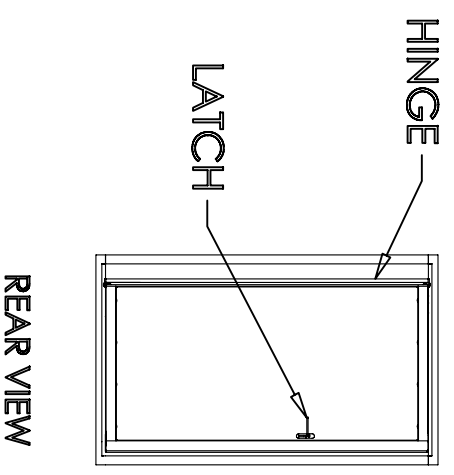


17" MIN. R.O. DEPTH

27 9/16" +1/4" -0 R.O.

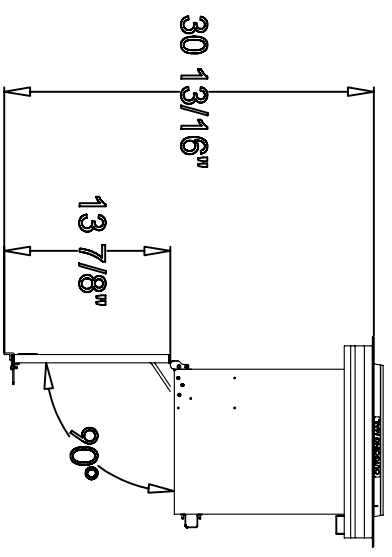

Rear load door detail:

1. Hinge rear door panels constructed of heavy-gauge steel and power coated postal grey.
2. Latch mechanism secures rear doors - this is the USPS approved standard design.
3. No USPS arrow lock required for rear doors.

- Installation requirements specified in USPS STD-4C include:
1. At least one customer compartment shall be positioned less than 48" from the finished floor.
 2. No parcel locker (interior bottom shelf) shall be positioned less than 15" from finished floor.
 3. No patron (tenant) lock shall be positioned more than 67" above finished floor.
 4. No customer compartment (interior bottom shelf) shall be positioned less than 28" from finished floor.

PRODUCT SERIES: VERSATILE™ 4C SUITE E
REAR LOAD

AF FLORENCE manufacturing company		5935 Corporate Drive • Manhattan, KS 66503 www.aufh-florence.com • (800) 275-1747	
MODEL	4CET6-XLR	DATE	12/5/07
SCALE	NONE	DRAWN BY	SAD
DRAWING NUMBER	4CET6XLRCS	SHEET	1 OF 1

A GIBRALTAR INDUSTRIES COMPANY