



INSTALLATION
EXAMPLE

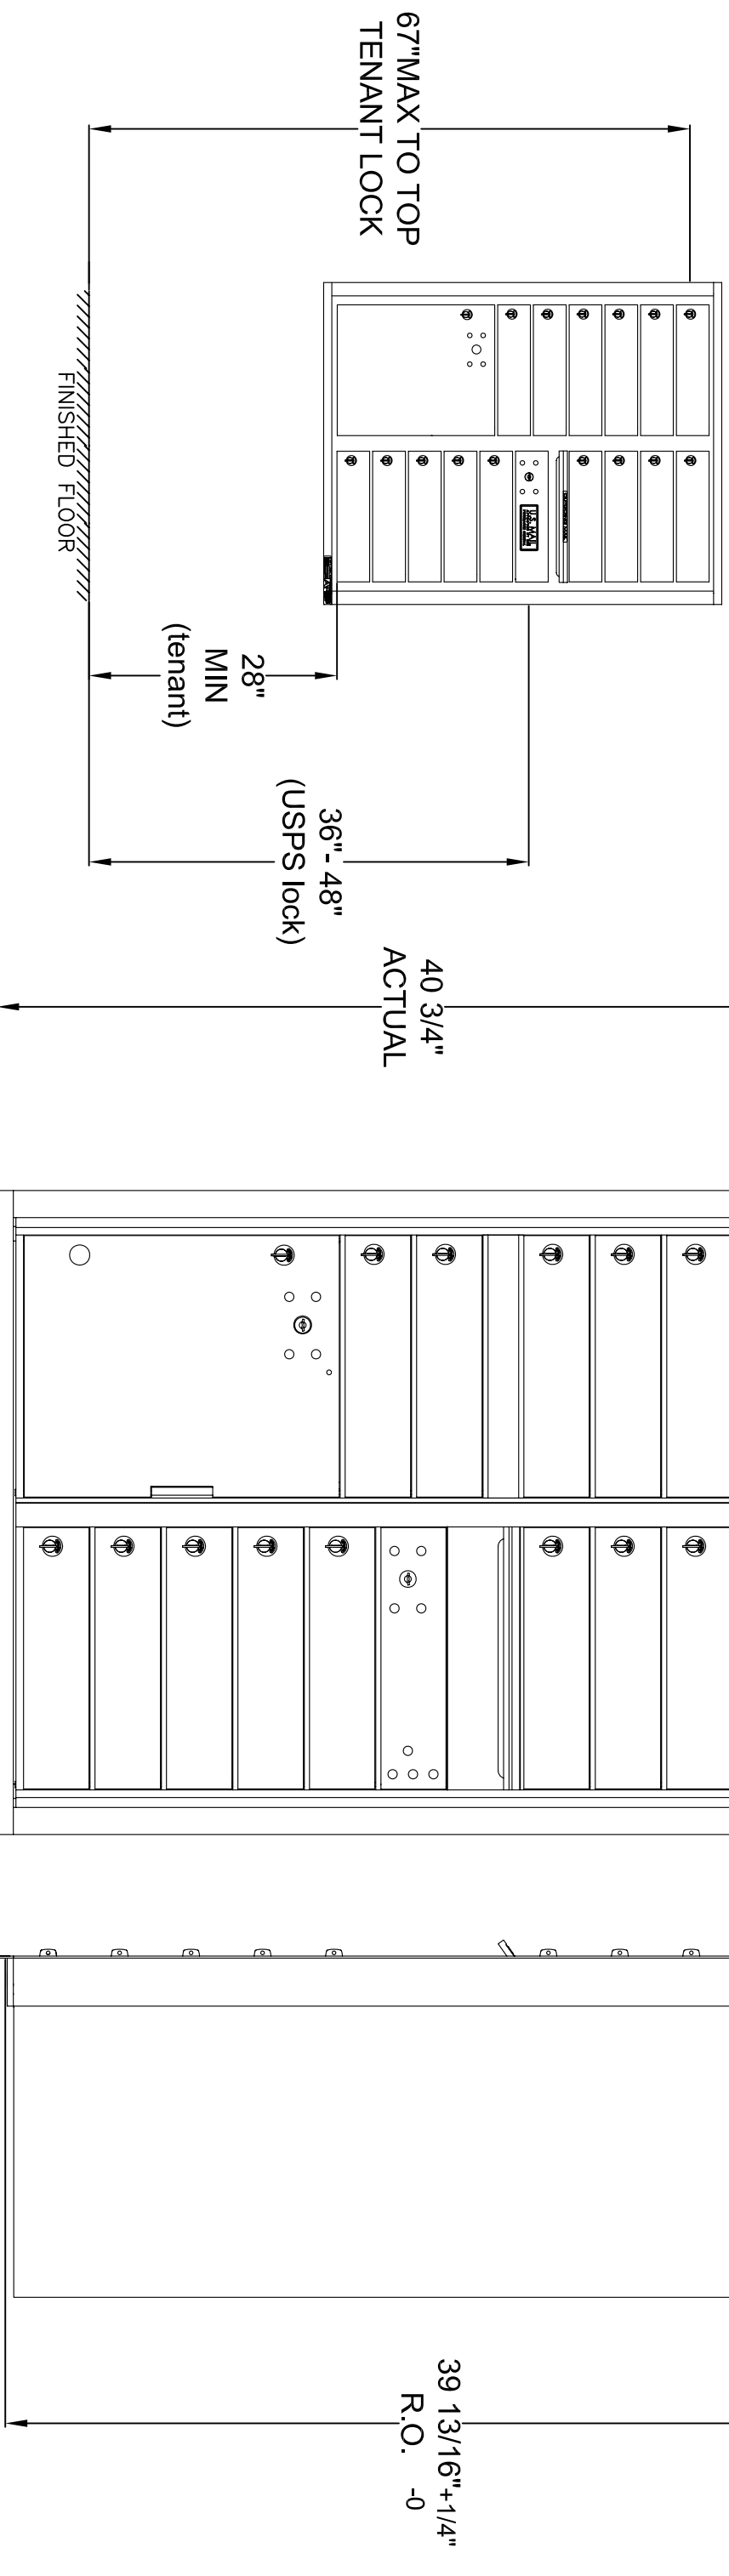

Installation requirements specified in USPS STD-4C include:

1. At least one customer compartment shall be positioned less than 48" from the finished floor.
2. No parcel locker (interior bottom shelf) shall be positioned less than 15" from finished floor.
3. No patron (tenant) lock shall be positioned more than 67" above finished floor.
4. No customer compartment (interior bottom shelf) shall be positioned less than 28" from finished floor.
5. The USPS Arrow lock shall be positioned 36" - 48" above finished floor.

PRODUCT SERIES: VERSATILE™ 4C SUITE H
FRONT LOAD

		MODEL 4CHT2-15		REV -	
5935 Corporate Drive • Manhattan, KS 66503 www.auth-florence.com • (800) 275-1747 <small>A GIBRALTAR INDUSTRIES COMPANY</small>		SCALE NONE	DATE 3/25/08	DRAWN BY SAD	SHEET 1 OF 1
		DRAWING NUMBER 4CHT215CS			