
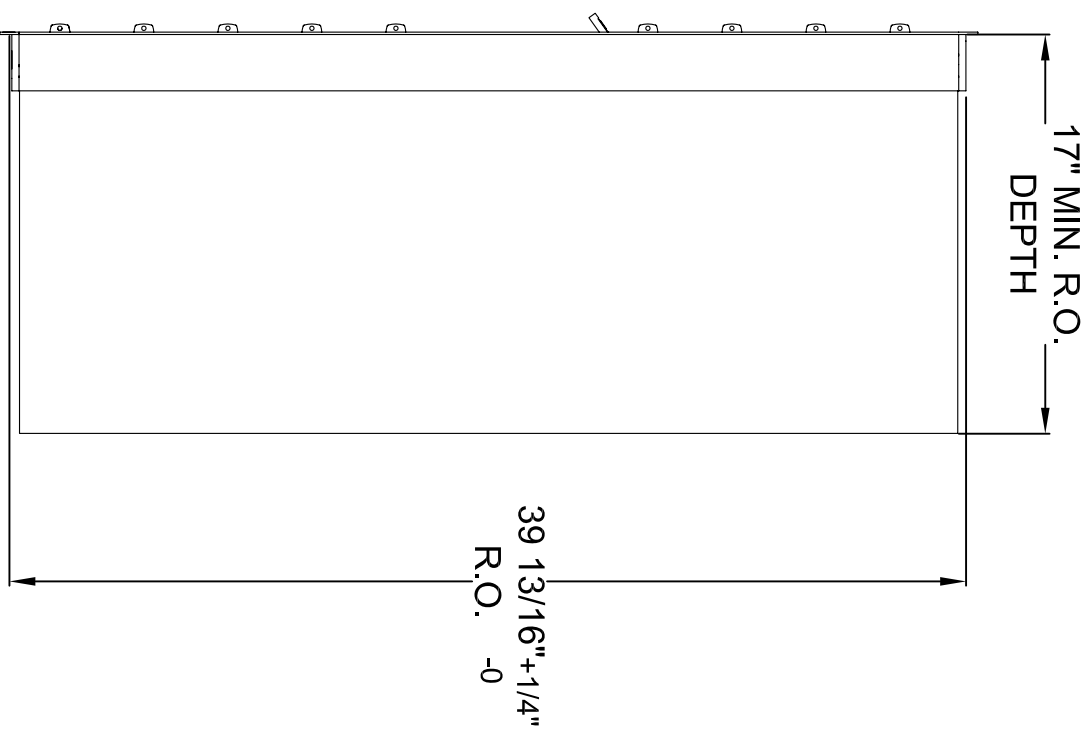
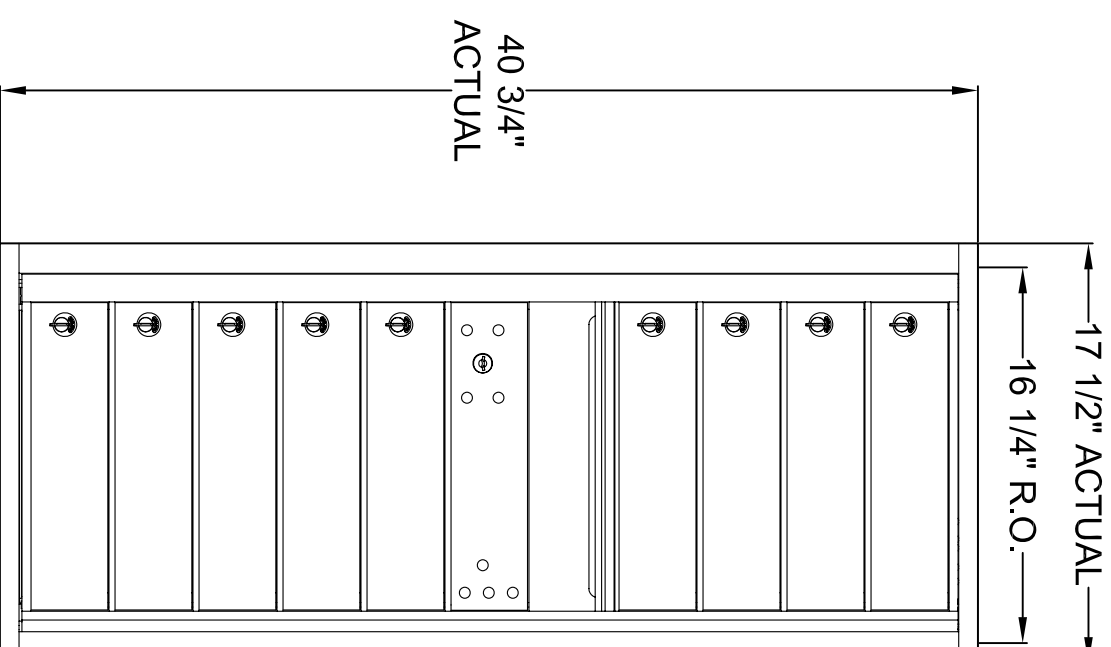


INSTALLATION
EXAMPLE

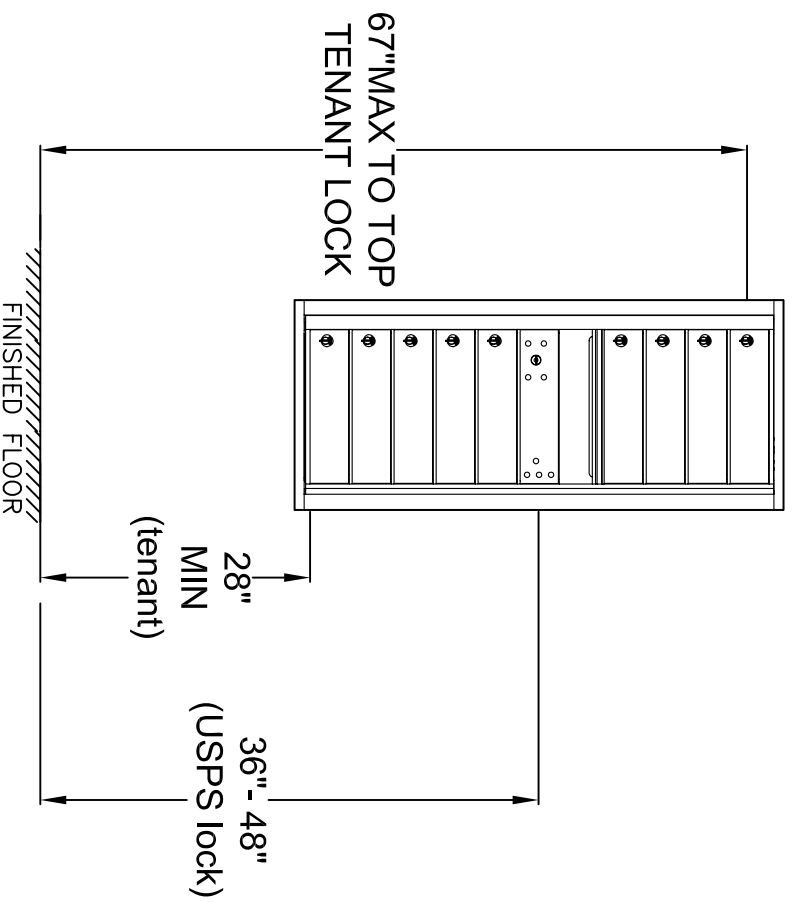

Installation requirements specified in USPS STD-4C include:

1. At least one customer compartment shall be positioned less than 48" from the finished floor.
2. No parcel locker (interior bottom shelf) shall be positioned less than 15" from finished floor.
3. No patron (tenant) lock shall be positioned more than 67" above finished floor.
4. No customer compartment (interior bottom shelf) shall be positioned less than 28" from finished floor.
5. The USPS Arrow lock shall be positioned 36" - 48" above finished floor.

PRODUCT SERIES: VERSATILE™ 4C SUITE H

FRONT LOAD

AF FLORENCE
manufacturing company

5935 Corporate Drive • Manhattan, KS 66503
www.auth-florence.com • (800) 275-1747

A GIBRALTAR INDUSTRIES COMPANY

MODEL	4CHT6-9	REV	-
-------	---------	-----	---

SCALE	NONE	DATE	3/25/08
-------	------	------	---------

DRAWING NUMBER	4CHT69CS	DRAWN BY	SAD
----------------	----------	----------	-----

DRAWING NUMBER	4CHT69CS	DRAWN BY	SAD	SHEET	1 OF 1
----------------	----------	----------	-----	-------	--------