



# versatile™ 4C Mailbox, 10 High Suite

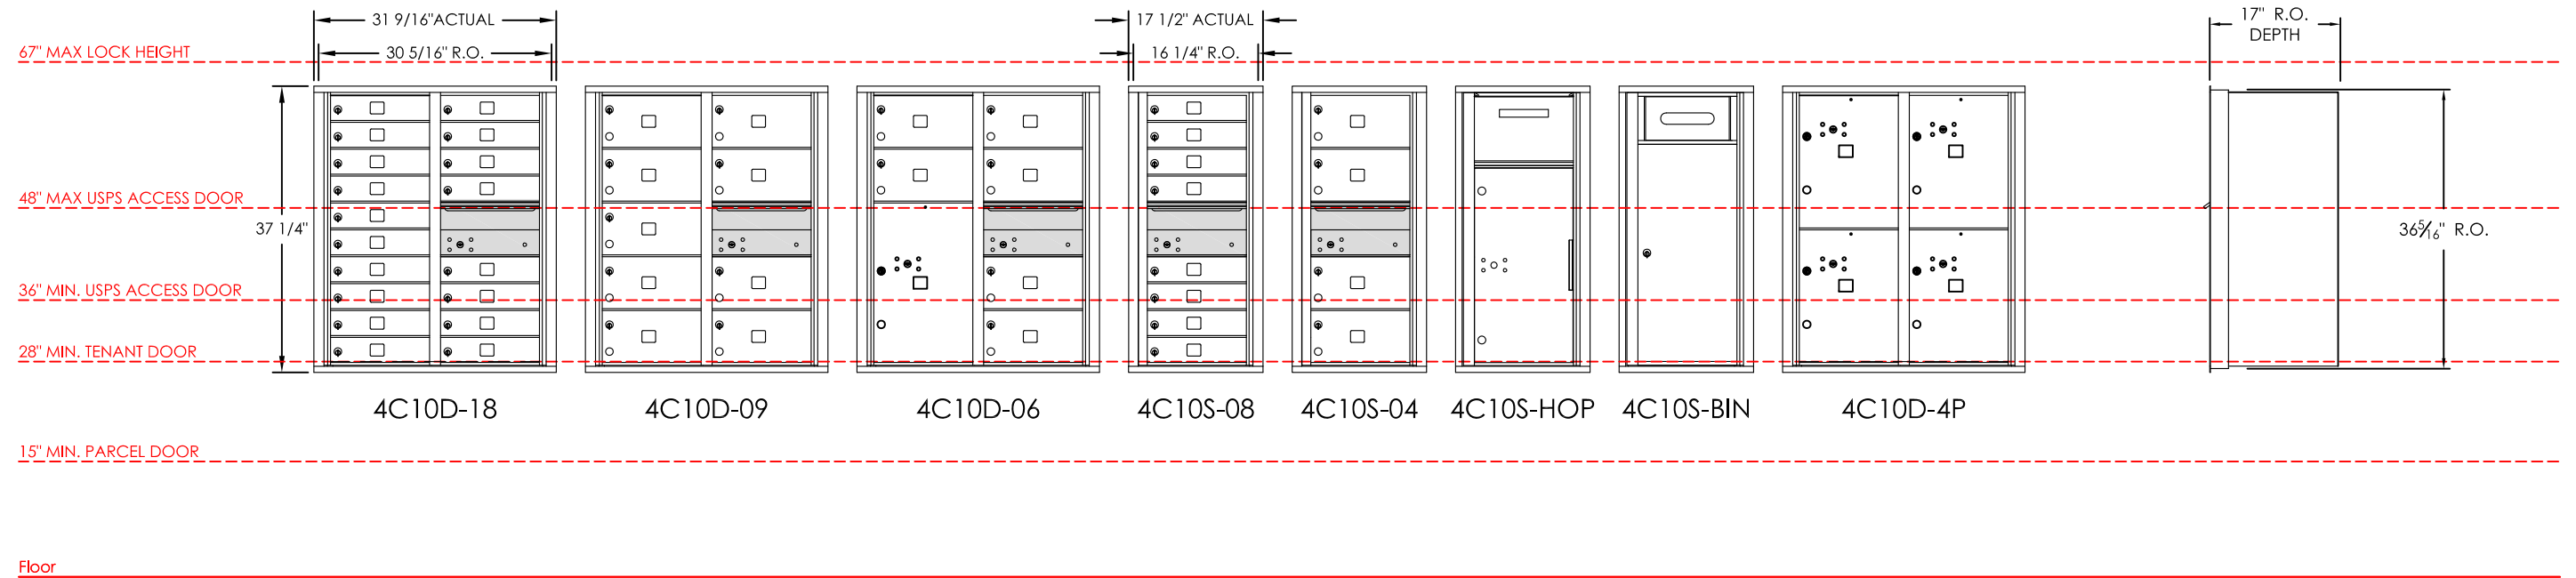

## NOTES:

1. Below are the USPS STD-4C installation guidelines:

- At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
- No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- No patron (tenant) lock shall be positioned more than 67" AFF.
- No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- The USPS Arrow lock shall be positioned 36" - 48" AFF.

PRODUCT SERIES: versatile™ 4C Mailbox 10 High Suite			
 5935 Corporate Drive • Manhattan, KS 66503 www.florencemailboxes.com • (800) 275-1747 A GIBRALTAR INDUSTRIES COMPANY	MODEL 4C10H	REV A	
	SCALE NONE	LAST REV DATE 5/13/2014	
	DRAWING NUMBER 4C10HCS	DRAWN BY AFD	SHEET 1 OF 1