


versatile™ 4C Mailbox, 8 High Suite

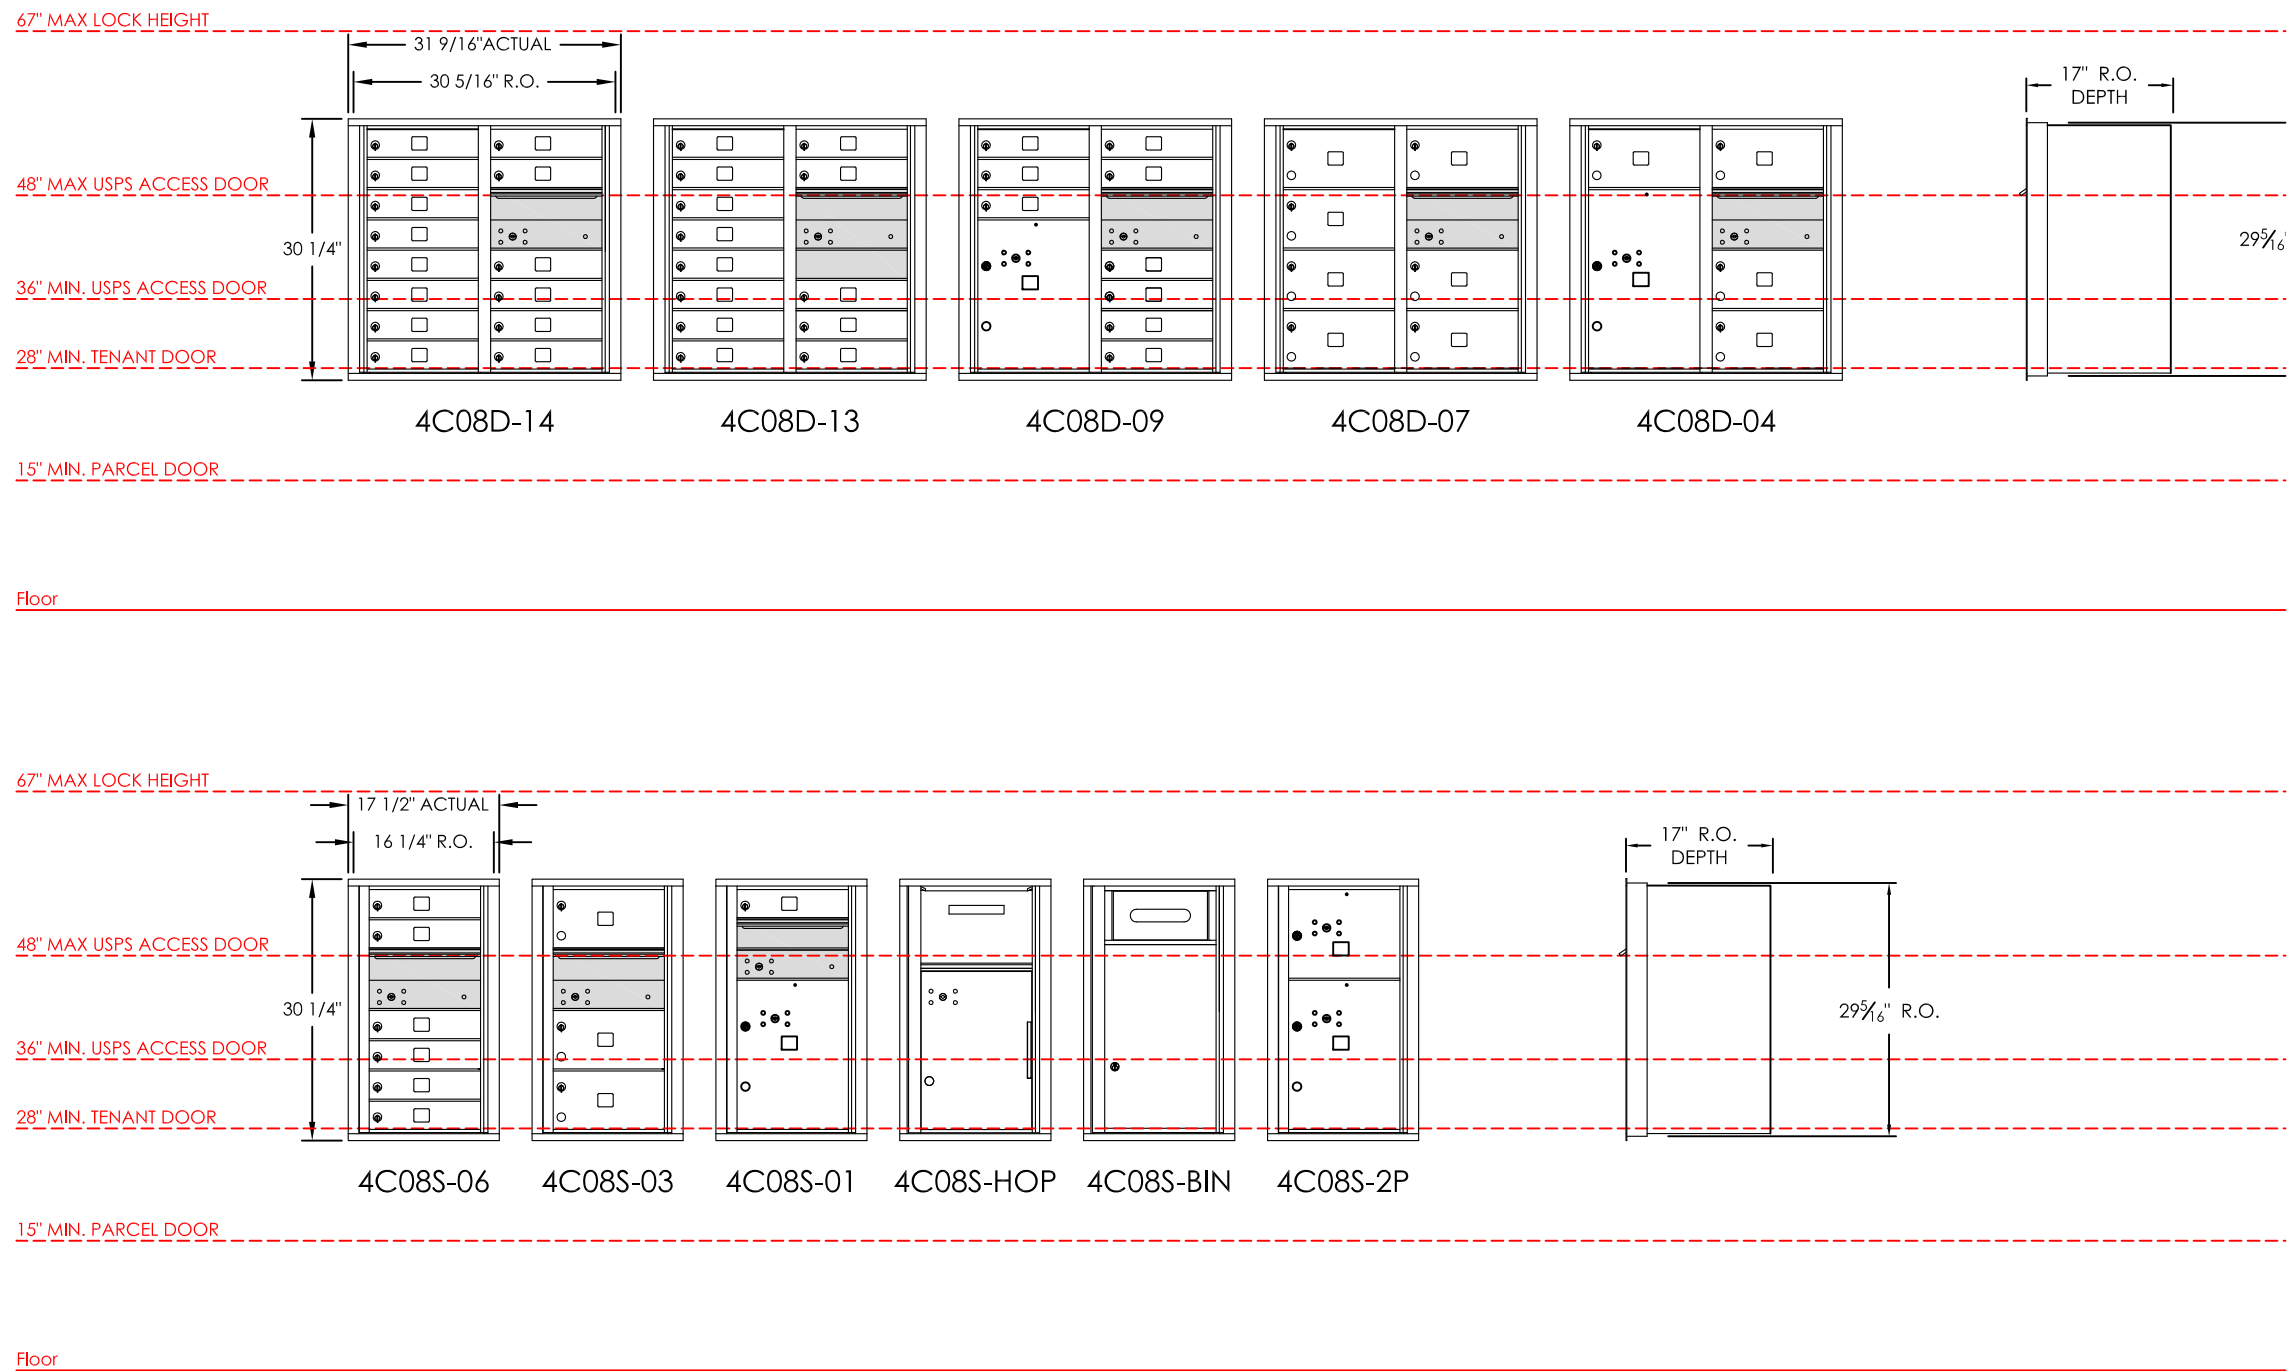

NOTES:

1. Below are the USPS STD-4C installation guidelines:

- At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
- No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- No patron (tenant) lock shall be positioned more than 67" AFF.
- No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- The USPS Arrow lock shall be positioned 36" - 48" AFF.

PRODUCT SERIES: versatile™ 4C Mailbox 8 High Suite

AF FLORENCE
manufacturing company
 5935 Corporate Drive • Manhattan, KS 66503
 www.florencemailboxes.com • (800) 275-1747
 A GIBRALTAR INDUSTRIES COMPANY

MODEL	4C8H	REV	A
SCALE	NONE	LAST REV DATE	5/15/2014
DRAWING NUMBER	4C8HCS	DRAWN BY	AFD
		SHEET	1 OF 1